

FC PORTFOLIOS

Ring Binder & Slipcase CMYK Digital Print Instructions

A. Printing on Binder

Artwork Quality Requirement


If your artwork is a **raster** (e.g. .tiff, .jpg, .png, .bmp) image, please make sure of the following:

- Artwork must be embedded and at least 300 DPI or it will print pixelated.
- Saved as **CMYK**, **NOT** RGB.

If your artwork is a **vector** (e.g. .eps, .ai, .pdf, .svg) image, please make sure of the following:

- All text is converted to outlines to ensure that it is displayed correctly when printed.
- Saved as **CMYK**, **NOT** RGB.

Artwork placement instructions

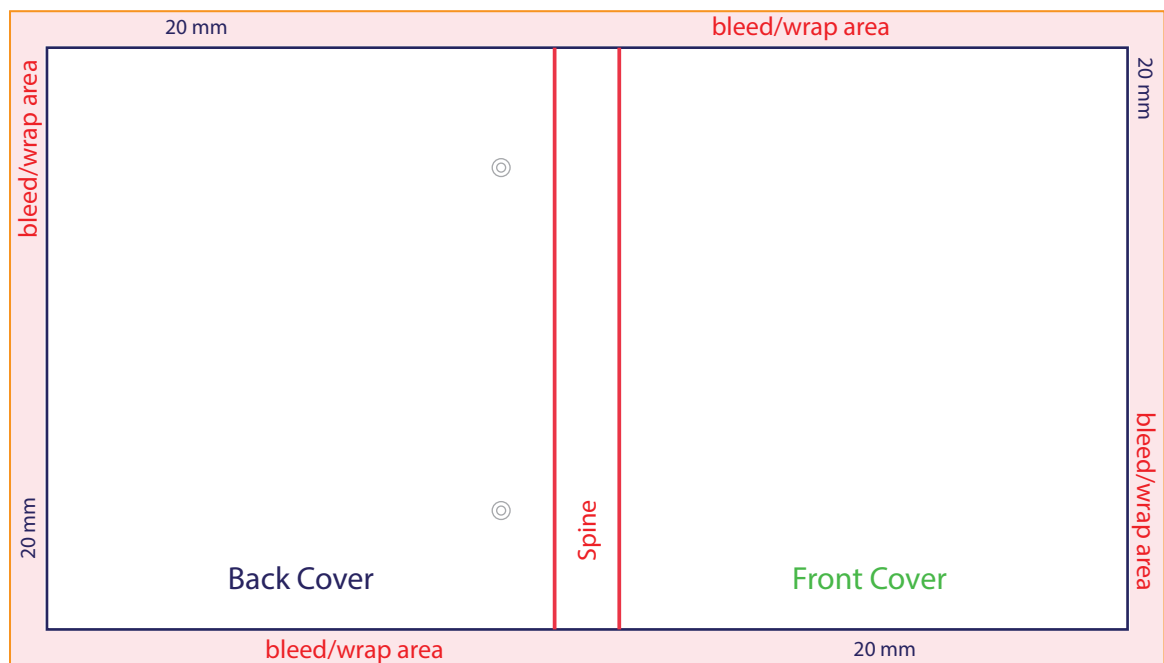

Spine area	
End of bleed area	
Edge of outer cover area	
Bleed/wrap area	
Ring metal studs on cover	

By following the steps below, your artwork will be print ready:

- ① Bleed all artwork to the yellow line.
- ② Outline all text and embed any images that are placed in the artwork.
- ③ Place a copy of your artwork without the template on the second page of the template.
- ④ Any unprinted area will remain the natural colour of the material, which is white cloth.
- ⑤ Avoid placing important details close to the metal studs and edges of the cover as the position may not be exact and varies according to the ring size.

! Please note:

- Submitted artwork is treated as approved artwork.
- **Front Cover** of the **Binder** is on the **right** of the screen.
- We can only reproduce the quality you provide.
Remember if the artwork looks pixelated on your screen, it will print pixelated as well.

FC PORTFOLIOS

Ring Binder & Slipcase - CMYK Digital Print Template Instructions

Print Example for Binder

Incorrect placement of artwork on template



Please make sure your art covers all the bleed/wrap areas

Correct placement of artwork on template



Please make sure your art covers all the bleed/wrap areas

Finished Product



Completed binder with slipcase



FC PORTFOLIOS

Ring Binder & Slipcase CMYK Digital Print Instructions

B. Printing on Slipcase

Artwork Quality Requirement


If your artwork is a **raster** (e.g. .tiff, .jpg, .png, .bmp) image, please make sure of the following:

- Artwork must be embedded and at least 300 DPI or it will print pixelated.
- Saved as **CMYK**, **NOT** RGB.

If your artwork is a **vector** (e.g. .eps, .ai, .pdf, .svg) image, please make sure of the following:

- All text is converted to outlines to ensure that it is displayed correctly when printed.
- Saved as **CMYK**, **NOT** RGB.

Artwork placement instructions

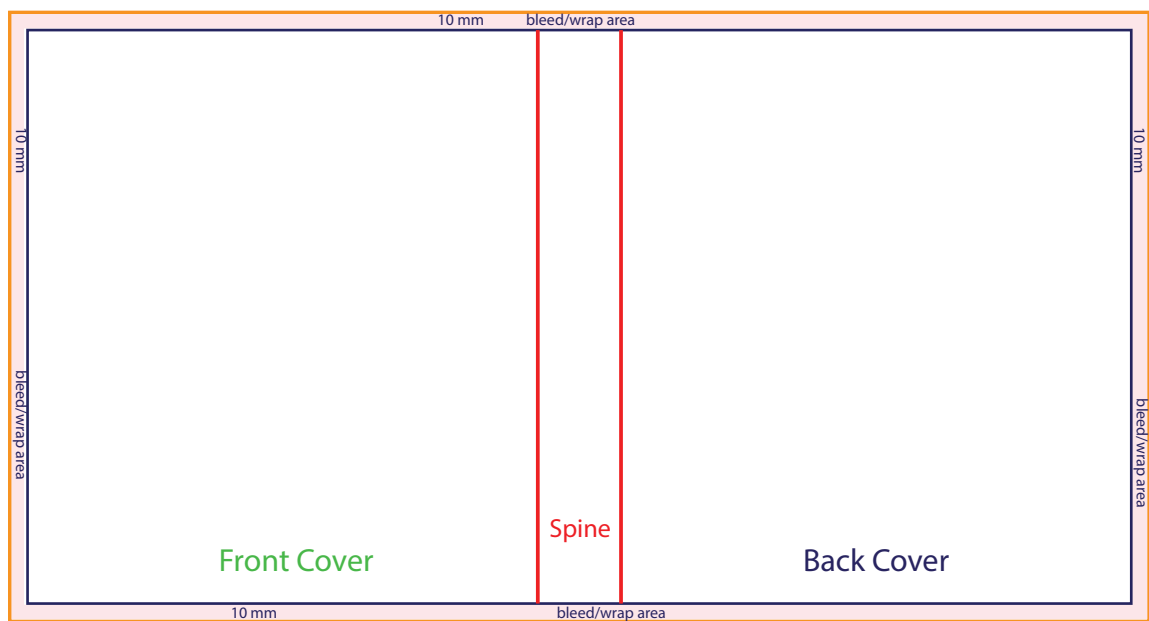

Spine area	
End of bleed area	
Edge of outer cover area	
Bleed/wrap area	

By following the steps below, your artwork will be print ready:

- ① Bleed all artwork to the yellow line.
- ② Outline all text and embed any images that are placed in the artwork.
- ③ Place a copy of your artwork without the template on the second page of the template.
- ④ Any unprinted area will remain the natural colour of the material, which is white cloth.
- ⑤ Avoid placing important details close to the **edges of the cover** as the position may not be exact and varies according to the ring size.

! Please note:


- Submitted artwork is treated as approved artwork.
- Top & Bottom material of the slipcase is black cloth.
- **Front Cover** of the **Slipcase** is on the **left** of the screen.
- We can only reproduce the quality you provide.
Remember if the artwork looks pixelated on your screen, it will print pixelated as well.

FC PORTFOLIOS

Ring Binder & Slipcase - CMYK Digital Print Template Instructions

Print Example for Slipcase

Incorrect placement of artwork on template

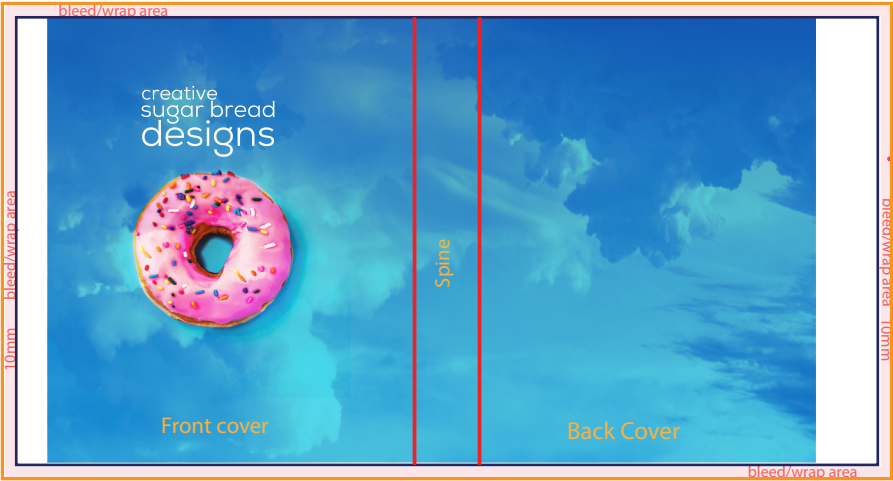

Please make sure your art covers all the bleed/wrap area



Correct placement of artwork on template



Please make sure your art covers all the bleed/wrap areas



Finished Product



(Edges have been wrapped underneath)



Completed binder with slipcase

